




YOUNGLOVE CONSTRUCTION, L.L.C

ADM MILLING FLOUR MILL AND GRAIN STORAGE MENDOTA, IL

**Commercial: Industrial & Public Works/
Environmental | (Over \$10 Million)**

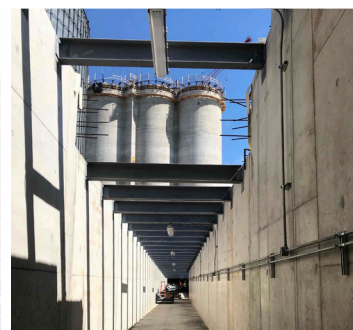

Size of Project:
N/A



Length of Project:
22 Months

TYPE OF CONSTRUCTION

Younglove Construction, L.L.C., was hired by ADM Milling as the general contractor to design and build their new flour milling and grain storage facility in Mendota, Illinois.

BUILDING FEATURES

The Younglove team maximized productivity and efficiency on this project. The Flour Mill consisted of: 13 tempering bins, two grinding bins, mill process, 35 finish flour bins, 12 flour tanks, 2 bagging tanks, ancillary structures, flour production, 26,430 c.y. of total concrete and 2,372 tons of total reinforcing. The Grain Storage consisted of: 10 silos, slip construction, rail receiving building, truck receiving, receiving tunnel, had a capacity of 2,328,700 bu, utilized 13,687 c.y. of total concrete and 1,130 tons of total reinforcing.